



Häfele Loox5 LED 3092

Recess mounted light 24 V, 3.4 W, drill hole diameter: 58 mm, IP44

5 24 V

2


12/24 V



- > Modular system: free design options with interchangeable housings and leads
- > Light with integrated cable socket for quick conversion
- > Equipped with high-quality Samsung LEDs




- > Dimmable: Yes
- > Area of application: Work light, kitchen and living room furniture, counters
- > Housing material: Aluminium
- > Number of LEDs: 6
- > Life time: 50000 h
- > Colour rendering index Ra: >90
- > Colour rendering index R9: >55
- > Weighted energy consumption: 3.74 kWh/1000 h
- > Energy efficiency class: A+
- > Mounting: For mounting in drilled hole and clamping, or for screw fixing
- > Drill hole diameter: 58 mm

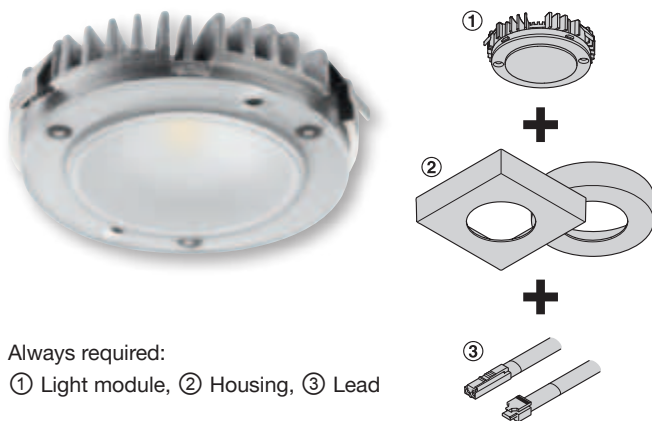

Always required:

- ① Light module, ② Housing, ③ Lead

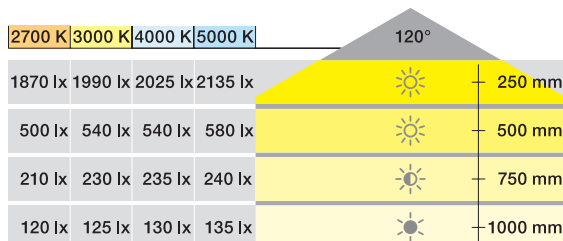

**Note**  
The IP44 degree of protection is reduced to IP20 when using a surface mounted housing.

**Supplied with**  
1 light module



Colour temperature K	Light colour	Luminous flux lm	Wattage W	Luminous efficiency lm/W	Cat. No.
2700	Warm white	220	3.4	65	833.75.174
3000	Warm white	240	3.4	71	833.75.175
4000	Cool white	250	3.4	74	833.75.176
5000	Cool white	260	3.4	76	833.75.177

Packing: 1 piece

**Order reference**

Please order light module, housing and lead separately.

- ❗ Multi-white light module, LED 3091, 24 V ▶ MB 2.194
- ❗ Installation rules in bathrooms in residential areas ▶ MB 2.390


DGH-M 2021, HDE-en, 10/20; Dimensional data not binding. We reserve the right to alter specifications without notice.



Accessories for light module with drill hole diameter of 58 mm

→ Loox5 lead for modular lights and other 2-pole consumers and distributors, 1.5 A

5 24 V




Cable length mm	Cat. No.
2000	833.95.791

Packing: 1 piece


→ Recess mounted housing



Recess mounted housing

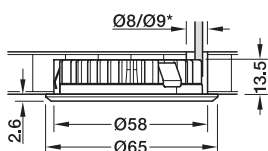

Recess mounting, round

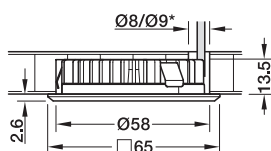

Recess mounted, straight-edged

\* valid for multi-white plug on multi-white light module

- > Material: Plastic
- > Mounting: For mounting in drilled hole, for clamp fixing




Colour/finish	Round	Square
Silver coloured	833.72.126	833.72.127
Black	833.72.168	833.72.172
Matt, nickel-plated	833.72.170	833.72.174
Signal white, RAL 9003	833.72.171	833.72.175
Anthracite	833.72.380	833.72.383
Brown	833.72.381	833.72.384
Stainless steel coloured	833.72.382	833.72.385

Packing: 1 piece


→ Surface mounted housing



Surface mounted housing



Mounting as down light, round




Surface mounted, straight-edged

\* valid for multi-white plug on multi-white light module

- > Material: Plastic
- > Mounting: For screw fixing

**Note**

Degree of protection with surface mounted housing is IP20




Colour/finish	Round	Square
Silver coloured	833.72.124	833.72.125
Black	833.72.160	833.72.164
Matt, nickel-plated	833.72.162	833.72.166
Signal white, RAL 9003	833.72.163	833.72.167
Anthracite	833.72.193	833.72.195
Brown	833.72.192	833.72.196
Stainless steel coloured	833.72.194	833.72.197

Packing: 1 piece

→ Driver set with Häfele Loox5 24 V 6-way distributor

5 24 V



**Supplied with**

- 1 driver
- 1 6-way distributor
- 1 mains lead, 2 m with EU flat plug

Distributor version	20 W	40 W
With switching function	833.77.963	833.77.964
Häfele Connect Mesh	833.77.960	833.77.961

Packing: 1 set

- ! Loox switches and sensors ▶ MB 2.267
- ! Connect Mesh control components ▶ MB 2.284