


Hinges with adjustable integrated soft-close mechanism operated by twin silicone-oil dampers housed in the hinge cup.


The decelerating effect is adjusted by using a simple switch.

Bright nickel plated steel cup and arm.
 Dimensions of the Ø 35 mm cup.
 Hinges for doors of small weight and thickness.

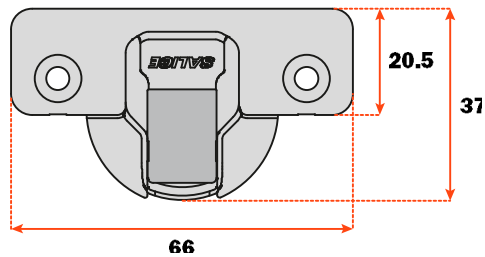

Constant "L" value of 0.7 mm (it does not change during side adjustment).

Approx. number of hinges required according to the door dimension and weight.

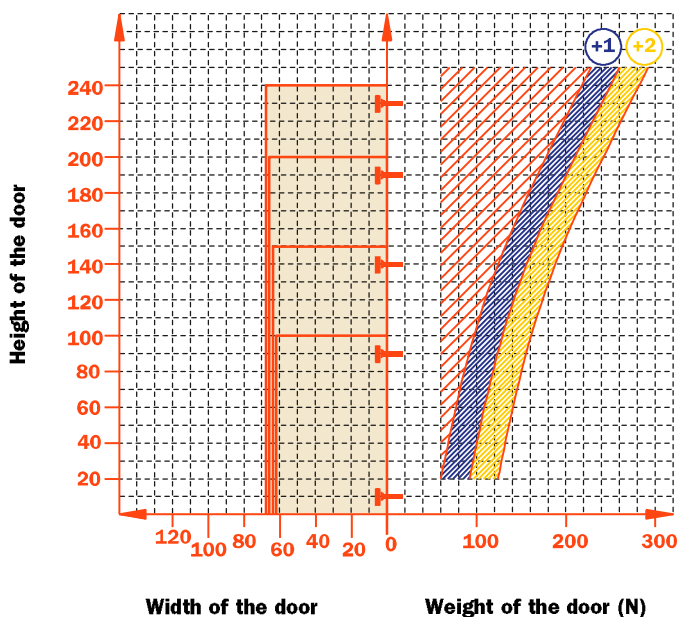

Adjustments

Compensated side adjustment from -1.5 mm to +4.5 mm.
 Height adjustment ±2 mm.
 Depth adjustment with Series 200 mounting plates +2.8 mm.
 Depth adjustment with Domi snap-on mounting plates from -0.5 mm to +2.8 mm.
 Anti-sliding safety stop.

Mounting plates

Symmetrical and asymmetrical bright nickel plated steel or die-cast Series 200 mounting plates. Snap-on assembly on Domi mounting plates. Positioning with pre-determined stop on traditional Series 200 mounting plates.

N.B. : Use POZIDRIVE No. 2 screwdrivers for all screws.